



Features:

- AC input voltage range selected by switch
- Small volume, low weight, high efficiency
- Protections : short circuit/over load/over voltage/over temp
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- 2 Years warranty

Dimension: 199 x 98 x 38mm

SPECIFICATION



	Model	LUXOR-16P5	LUXOR-16P12	LUXOR-16P15	LUXOR-16P24
Output	DC voltage	5V	12V	15V	24V
	Voltage tolerance	± 1%	± 1%	± 1%	± 1%
	Rated current	24A	13.4A	10.7A	6.7A
	Current range	0~24A	0~13.4A	0~10.7A	0~6.7A
	Rated power	120W	160W	160W	160W
	Ripple&noise	150mVp-p	180mVp-p	200mVp-p	240mVp-p
	DC voltage ADJ. range	± 10%	± 10%	± 10%	± 10%
Input	Setup, rise, hold up time	1000ms,100ms,30ms/230VAC.			
	Voltage range	90 ~ 132VAC/180 ~ 264VAC(Selected by switch) 47 ~ 63Hz, 255 ~ 373VDC			
	AC current	4.0A/115V 2.0A/230VAC			
	Efficiency	80%	83%	85%	85%
	Inrush current	Cold start 18A/115V 36A/230VAC			
Protection	leakage current	< 3.5mA/240VAC			
	Overload	Rated output power 115% ~ 150% Start overload protection Protection type: hiccup mode, auto-recovery after fault condition is removed			
	Over voltage	Rated output power 115% ~ 135% Start overload protection Protection type: hiccup mode, auto-recovery after fault condition is removed			
	Over temperature	≥85°C ± 5°C(TSW1 detect on heatsink of power transistor) Protection mode: cutoff output, auto-recovery after temperature become normal			
	Working temp, humidity	-10°C ~ +60°C; 20% ~ 90%RH(Please refer to "derating curve")			
Environment	Storage temp, humidity	-20°C ~ +85°C; 10% ~ 95%RH Non-condensing			
	Withstand vibration	10 ~ 500Hz, 2G 10min./1Cycle, Period for 60min, Each axes			
Safety	Withstand voltage	I/P-O/P: 1.5KVAC I/P-FG: 1.5KVAC O/P-FG: 0.5KVAC			
	Isolation resistance	I/P-O/P: I/P-FG,O/P-FG: 100M Ohms/500VDC			
Fit standard	Safety standard	EN61347-1; EN61347-2-13			
	EMC Standard	EN55015; EN61547			
Others	Dimension	0.65kg 199*98*38mm (L*W*H)			
	Weight	0.65kg/30pcs/20.5kg/1.20CUFT			


Note: 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

3. Tolerance : includes set up tolerance, line regulation and load regulation.

Mechanical specification


Unit:mm

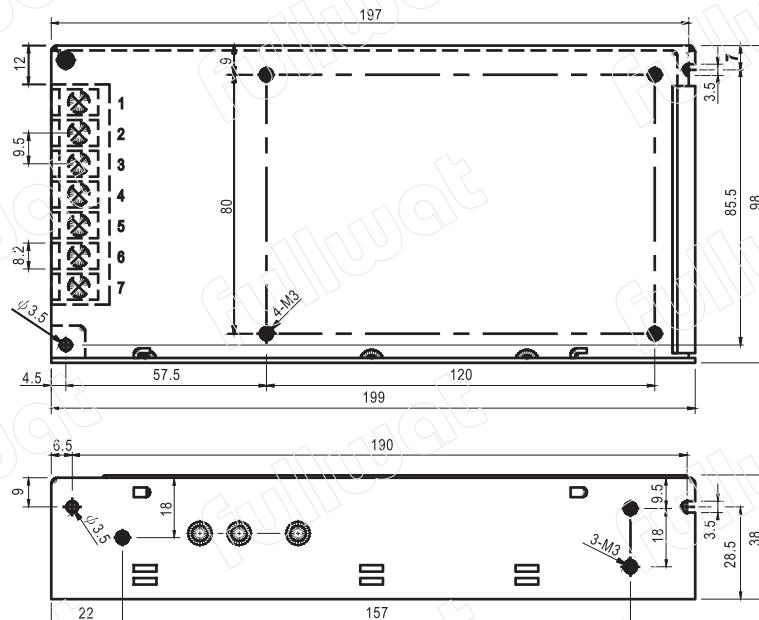


Terminal Pin No.Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4 ~ 5	DC OUTPUT-V
2	AC/N	6 ~ 7	DC OUTPUT+V
3	FG ±		

Block diagram

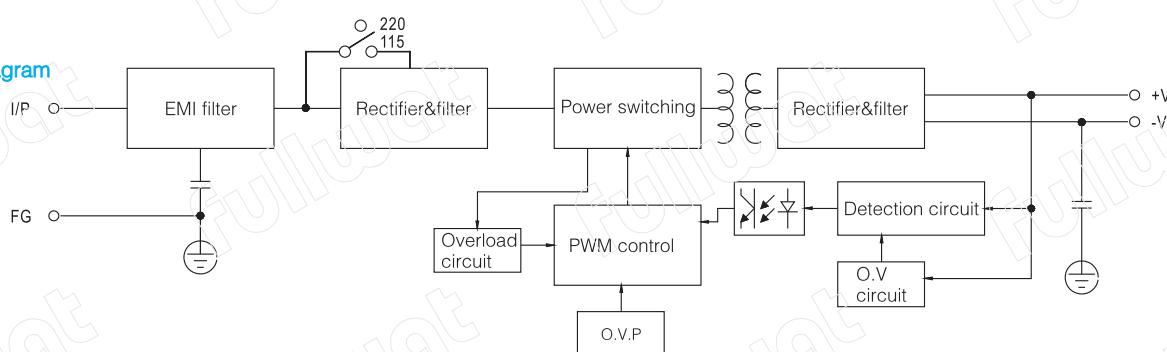

Derating curve

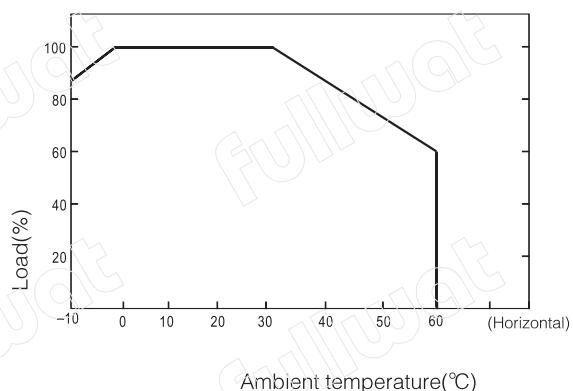

Static characteristic

